

DEHORS JS SERIES SEMI OUTDOOR

27" Self-Service Kiosk

Highlights:

- 27" true-flat PCAP touch screen
- Flexible configurations: Floor-standing fixing system
- Prestigious design with anti-scratch painting
- High energy saving electronics
- Easy access with two lockable door in the back



Windows/Android



NFC/RFID Reader



ID Scanner



EMV Supportive*



Ticket Dispenser



Receipt Printer

Popular Uses:

- Product display & advertising
- Self-ordering & payment
- Click & collect
- Ticketing & e-reservations
- Wayfinding & customer guidance



FOR MORE INFORMATION
CALL +49 8152 3962500
OR VISIT US AT KIOSK.EU

DEHORS JS SERIES

DEHORS JS Series is a customized kiosk design providing a special rugged enclosure for semi outdoor* applications and that can accommodate a wide array of configurations. This design features a 27-inch LCD mounted in portrait presentation. It design allow a flexible combination of several configuration, even the possibility to be customized with a special sanitizing touchless gel dispenser. The easy backside maintenance complete its extraordinary features.




Components:

- 27" touchscreen
- NFC, ID cards, RFID documents and passports reader
- Customizable Pc with different operating systems
- Verifone payment devices (optional)
- 4 MP camera
- Compact 3" printer
- Internal cooling system
- LAN connection






*semi outdoor: hybrid solution of fully rugged outdoor and indoor kiosk. It requires protected area, to prevent from direct rain, snow and other environmental effects.



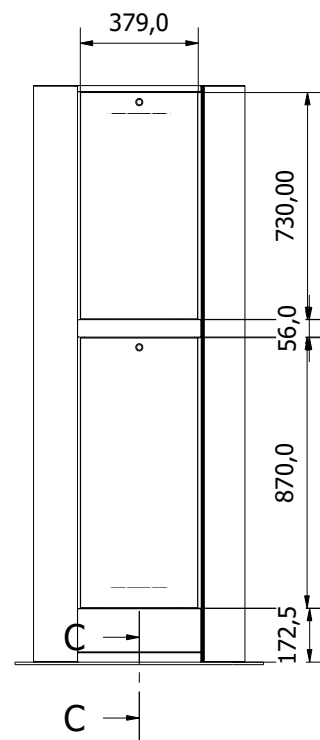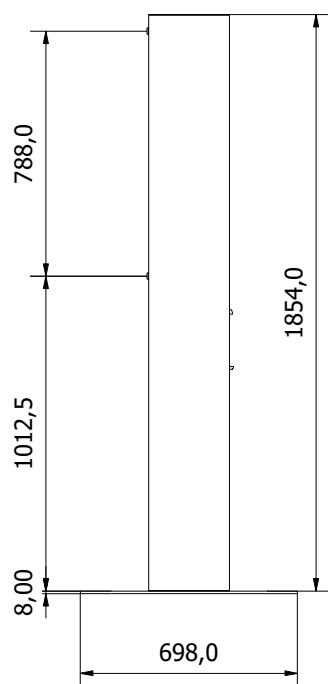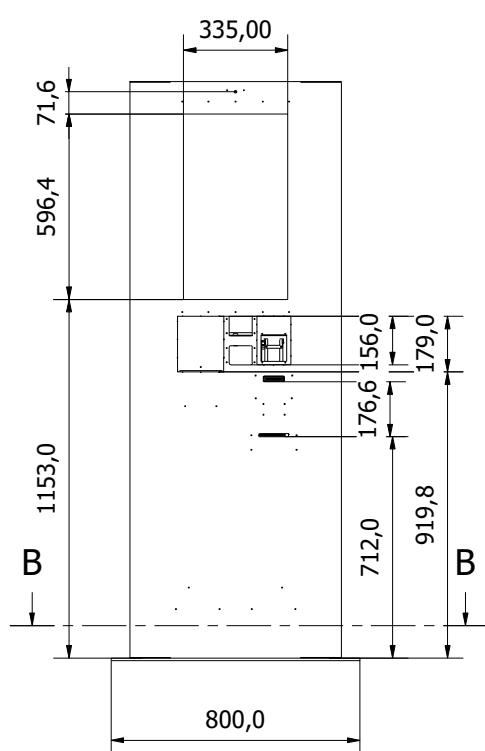

B-B (1 : 16)

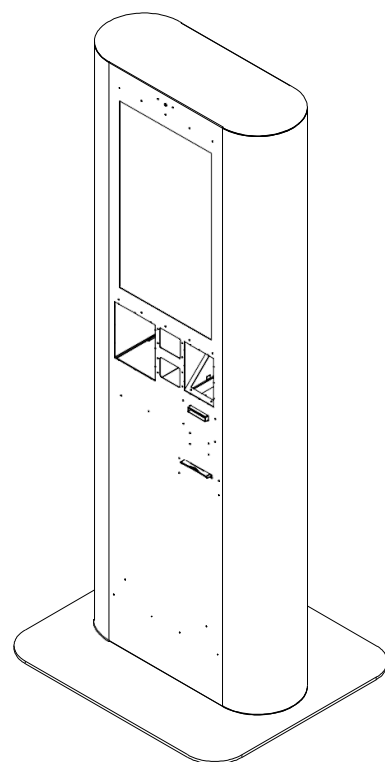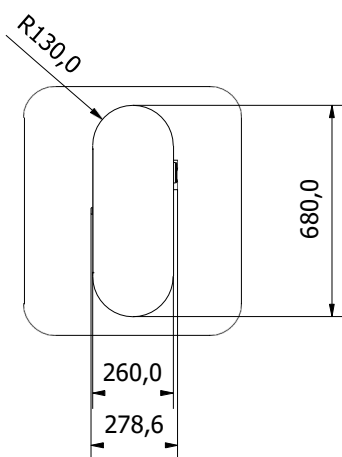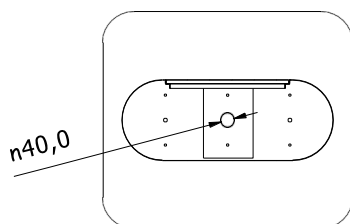

DEHORS JS SERIES SPECIFICATIONS

System Configuration	DH-2710	DH-2730	DH-2750
Processor	Rockchip RK3399, Dual-core Cortex A72, Quad-core Cortex A53	Intel Bay Trail J1900 Quad Core, up to 2.42 GHz, 2M Cache	Intel Kaby Lake U Core i3/i5
System Memory	DDR4 4 GB	1x DDR3L SO-DIMM slot, max. 8 GB	1x DDR4 SO-DIMM slot, max. 16 GB
Storage Device	32 GB eMMC + 1x microSD slot	1x M.2 SSD [SATA Signal Only]	
Power Supply	1x 12V/60W + 1x 24V/60W		
OS support	Android 9.0/Android 10.0 with GMS	Windows 7/POSReady 7/Windows Embedded 8.1 Industry/Windows 10 IoT	Windows 10 IoT 64 bit
Serial Port	2x RJ50, 5V/12V support on all COM ports	1x DB9 + 2x RJ50 5V/12V support on all COM ports	
Standard USB Port	1x USB 3.0 + 5x USB 2.0	1x USB 3.0 + 7x USB 2.0	2x USB 3.0 + 6x USB 2.0
OTG USB	1x Micro-USB	N/A	N/A
Display Port	1x HDMI		
LAN Port	1x 10/100 Mb 1x 10/100/1000 Mb	2x 10/100 Mb 2x 10/100/1000 Mb	
Audio	2x Internal 3W speaker		
Internal Expansion Slot	N/A	1x M.2	

Display & Touch

LCD	27"
Resolution	1920 x 1080
Touch	Projective Capacitive touch-screen 10pt

Physical Dimension

Dimension (WxDxH in mm)	Without basis: 1854 x 680 x 260 With basis: 1862 x 800 x 698
Weight (N. W. in kg)	90

Environmental

Operating Condition	0°C - 40°C H 20%RH - 80%RH
Storage Condition	-20C 60C, 10% 85%, non-condensing

Standard Components

Camera	2MP Fixed-focal Pinhole Network Camera
Printer	Thermal printer 82.5mm, autotripper, > 250mm/sec

Optional Components

WiFi	
Scanner	Barcode & ID Document Scanner (RFID, passport)
Card dispenser-collector	Support Mifare 1 ISO15693, ISO14443A standard card read, write and issuing
Payment system pinpad	2.5" pinpad, white backlit
Payment system card reader	Hybrid, triple track MSR, landed smart card, EMVCo approved
Payment system nfc/rfid	ISO14443 A&B, MiFare, ISO18092 capable, supports major NFC/contactless schemes